

(12)

(19)

(11)

2 251 893<sub>(13)</sub>A

(13).

(43) Date of A publication 22.07.1992

(22) Date of filing 08.11.1991

(30) Priority data

**(31) 07642768**

**(32) 18.01.1991**

(33) US

**(71) Applicant**

**John Timothy Sullivan**

3910 Madison Street, Hyattsville, Maryland 20781,  
United States of America

(72) Inventor

**John Timothy Sullivan**

(74) Agent and/or Address for Service

**Saunders & Dollevmore**

9 Rickmansworth Road, Watford, Herts, WD1 7HE,  
United Kingdom

(51) INT CL<sup>5</sup>

F04D 29/42 29/60 29/66

(52) UK CL (Edition K)

F1C CFE CFJ CFS C104

(56) Documents cited

**GB 2181183 A**

**GB 0989348 A**

US 3491550 A

**(58) Field of search**


UK CL (Edition K) F1C CFE CFJ CFS

INT CL<sup>6</sup> F04D 29/40 29/42 29/66

On-line databases : WPI

(54) **Volute housing for fan or blower**

(57) A volute housing is disclosed for use with a centrifugal fan, blower or the like, and includes a housing body defined by opposite spaced sidewalls eg. 42, a volute peripheral wall 60 disposed between the sidewalls and defining therewith and with an impeller a volute chamber, and the sidewalls each having a generally minimum radial dimension located at a tongue 43 of the volute chamber which progressively increases to a maximum radial dimension located at a throat 46 of the volute chamber. The sidewalls include first sidewall portions eg. 72 which are generally parallel to each other between the tongue and a transition zone T 180° therefrom, and second sidewall portions eg. 74 of the sidewalls from the transition zone to the volute throat at approximately 360° are in diverging relationship in a direction away from the transition zone whereby fluid/air flowing through the housing body expands progressively axially outwardly as it flows between and along the second sidewall portions. The specification also describes means for interconnecting the housing parts by fasteners 15 defined by male and female parts.

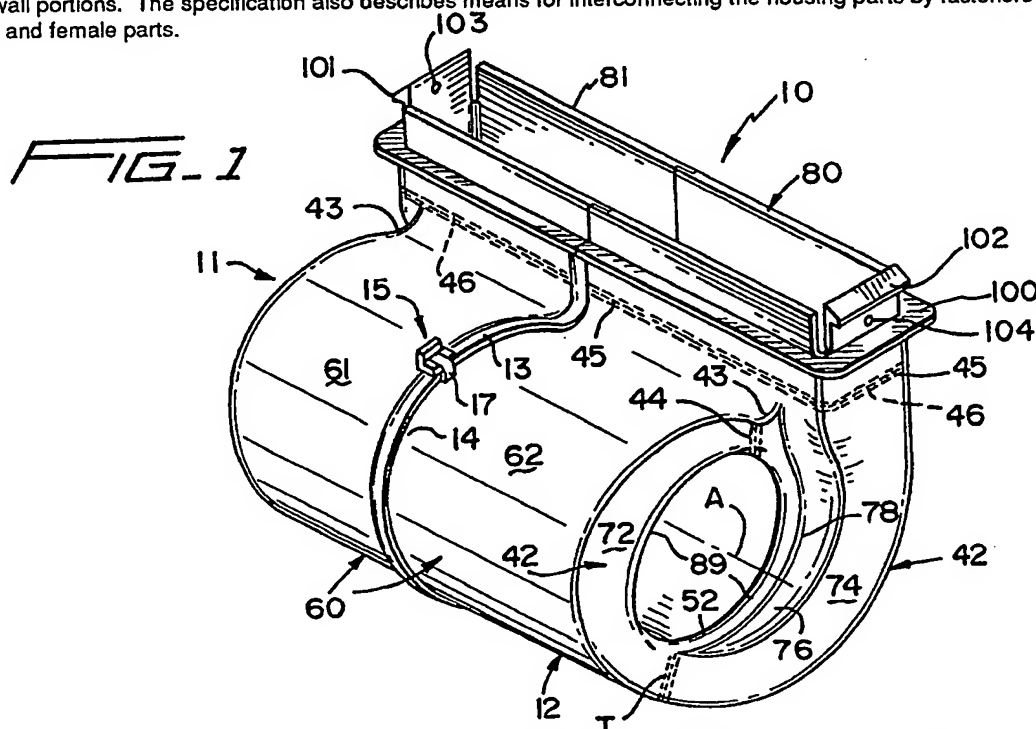

At least one of these pages has been prepared from an original which was unsuitable for direct photoreproduction.

GB 2 251 893 A

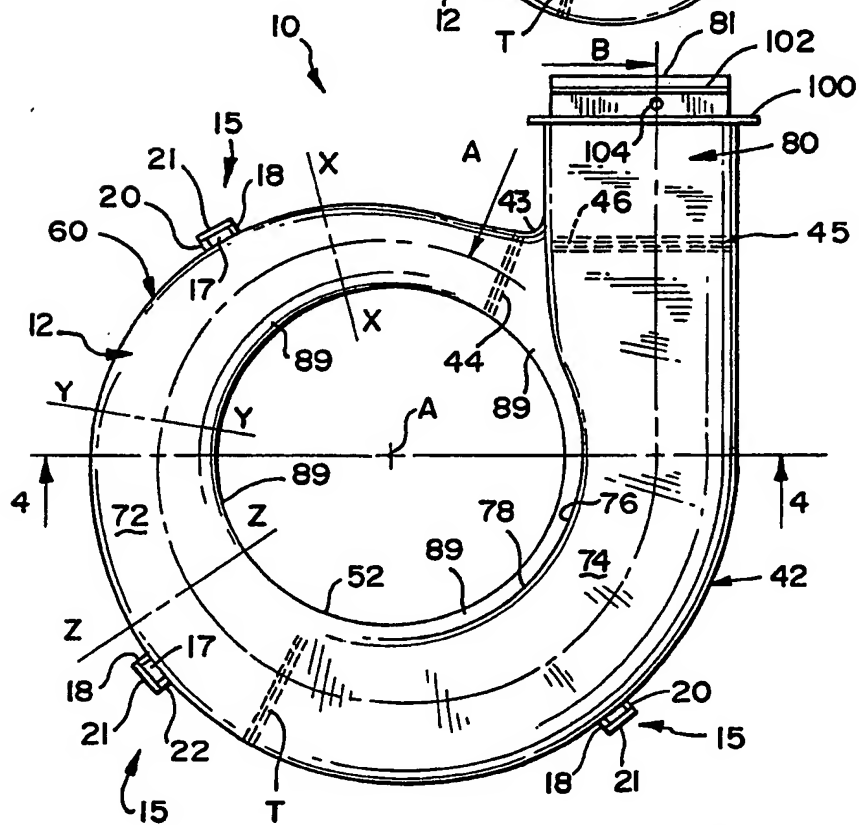
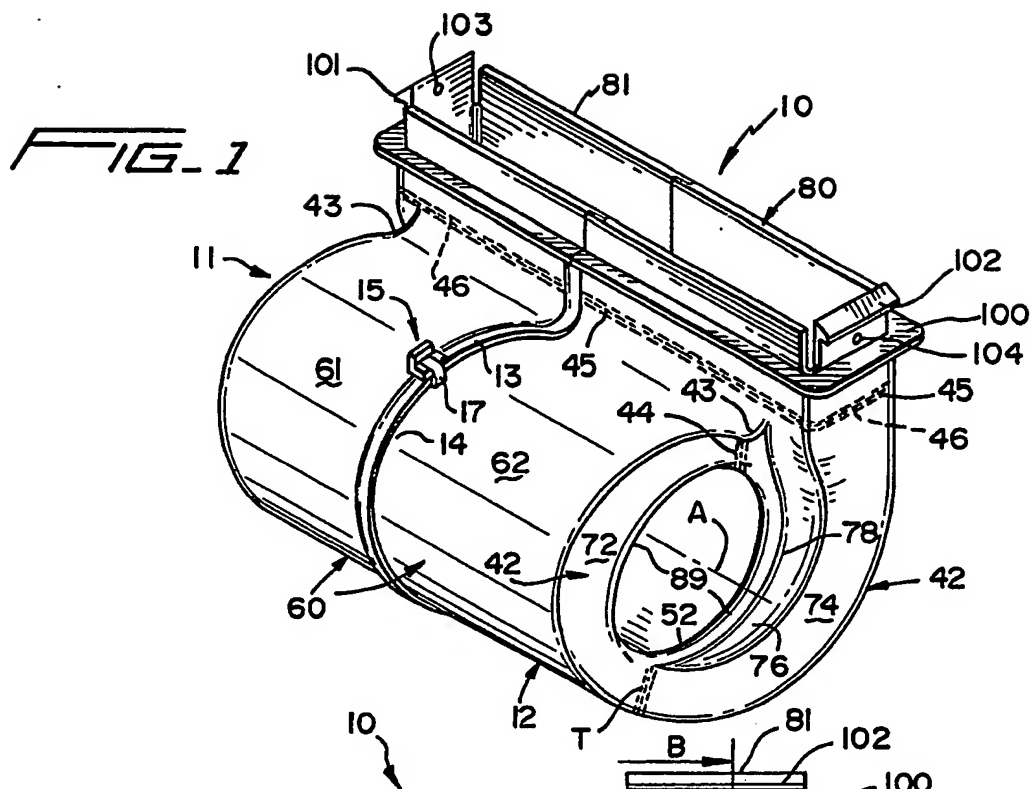


FIG. 2

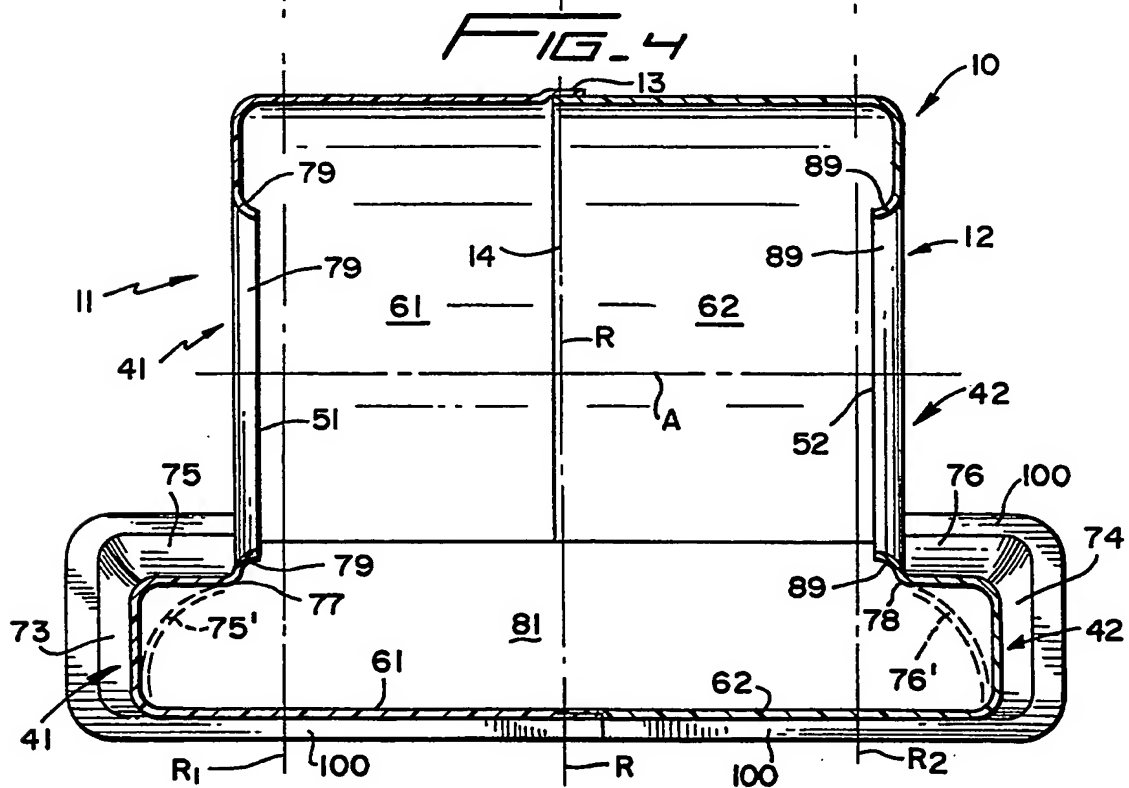
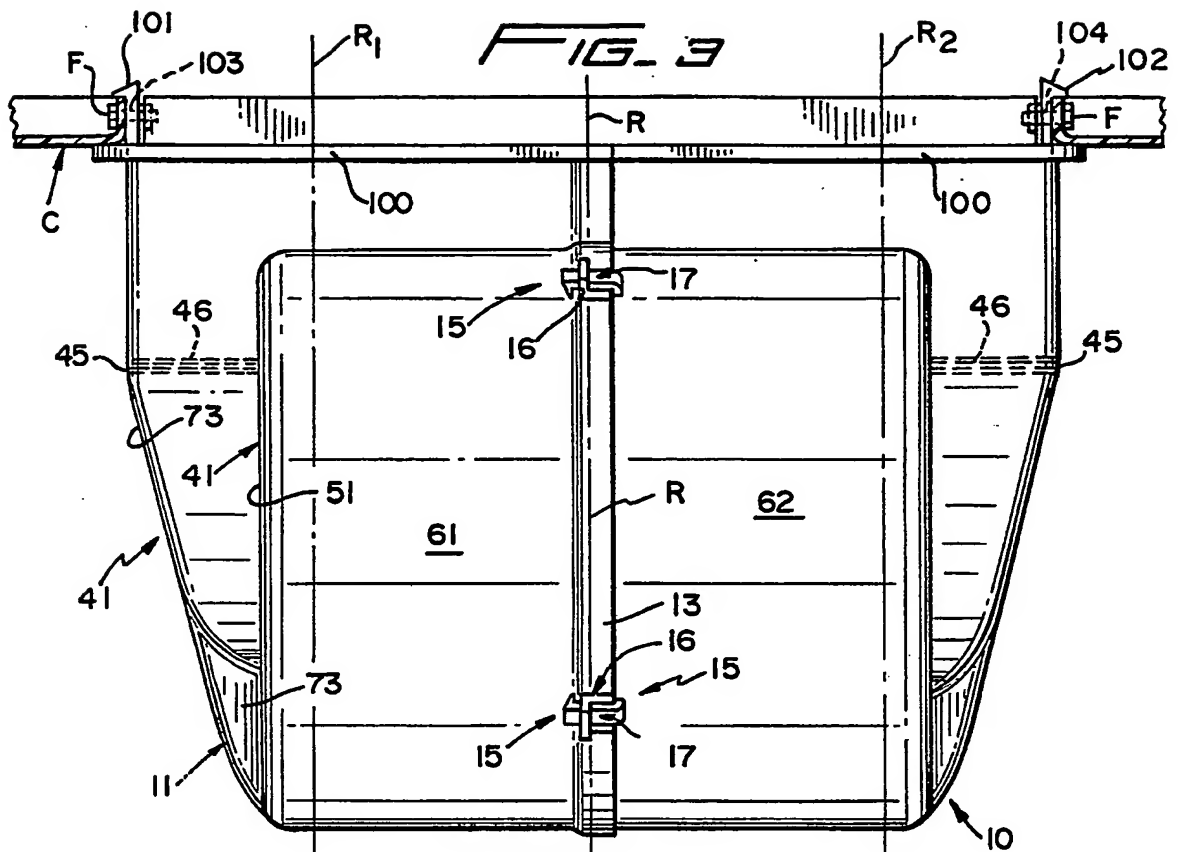


FIG. 5

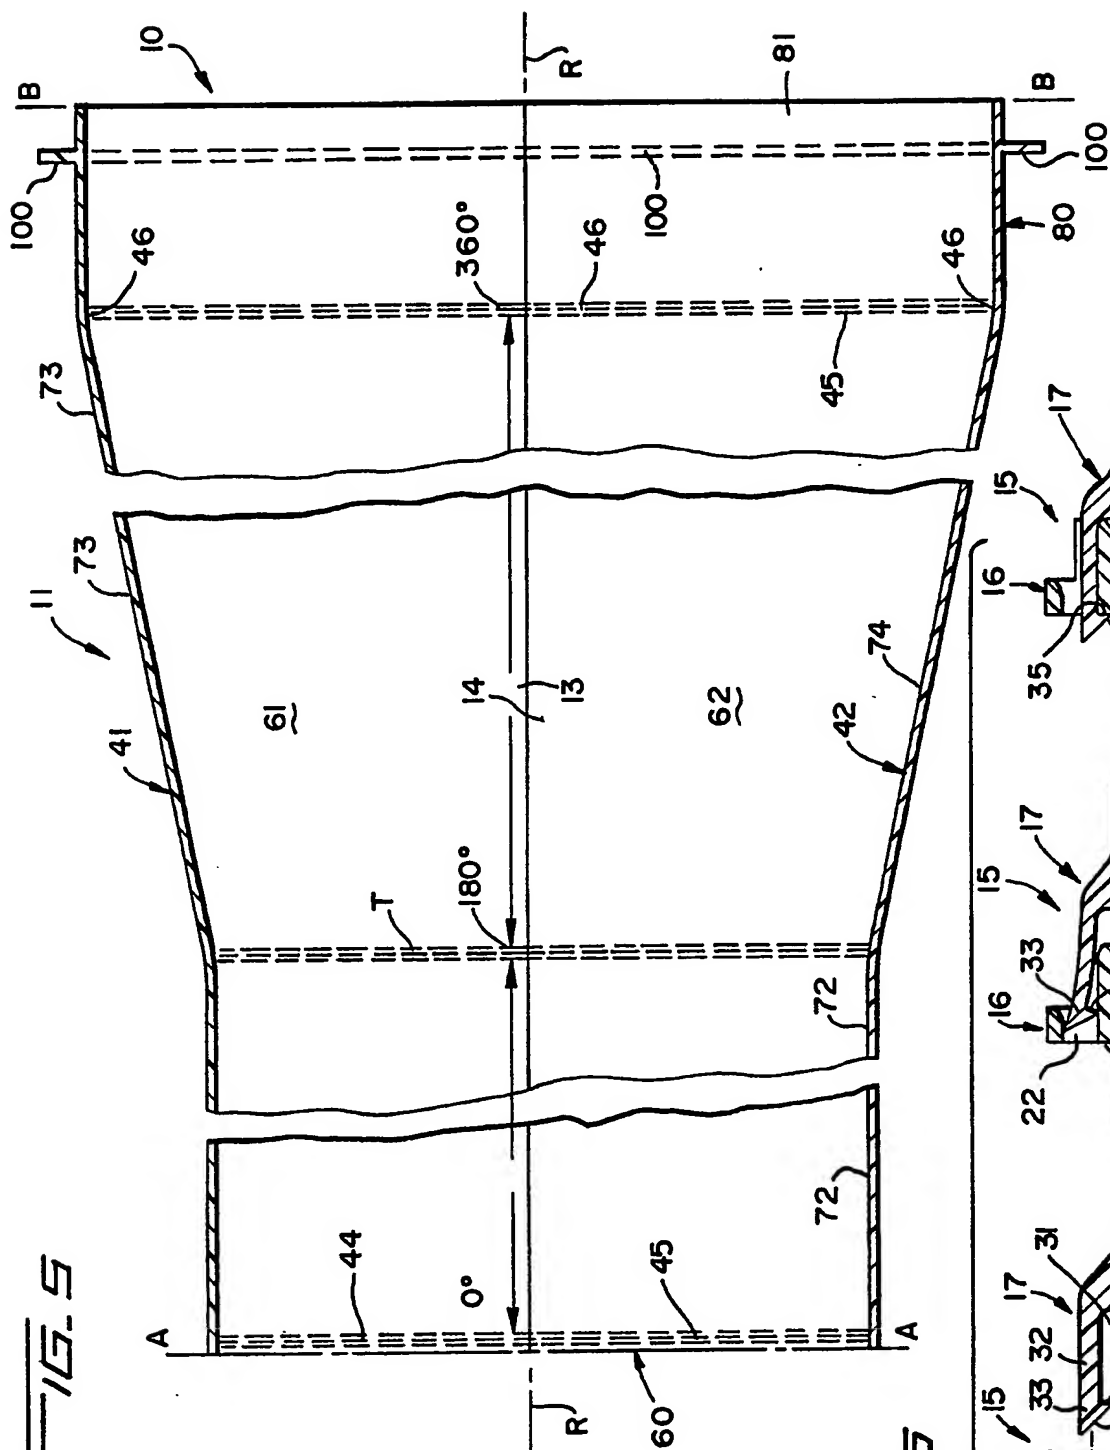
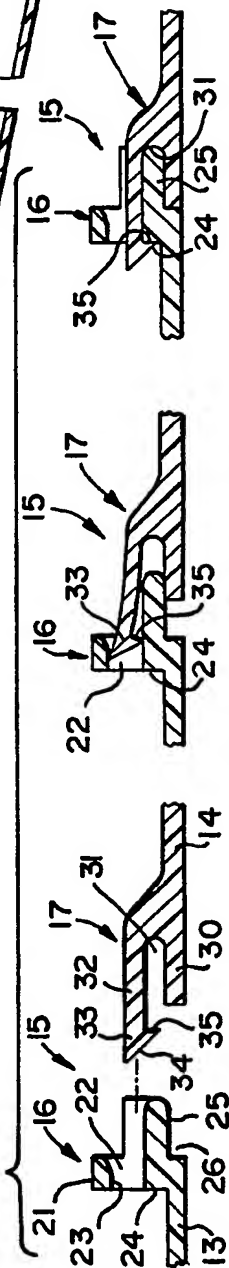


FIG. 6



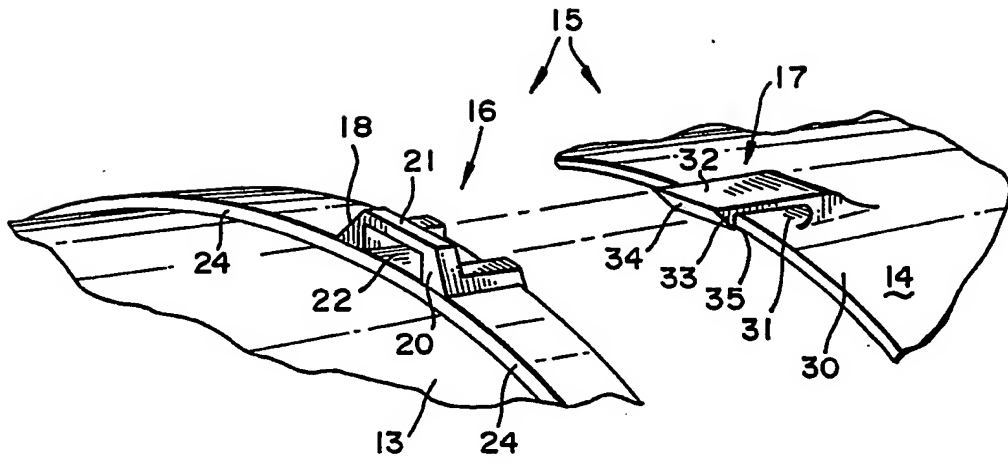


FIG. 7

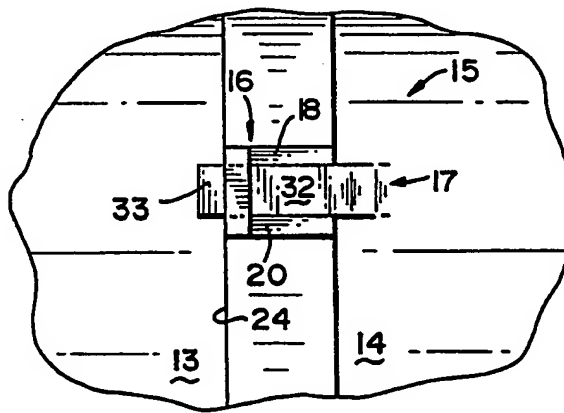


FIG. 8

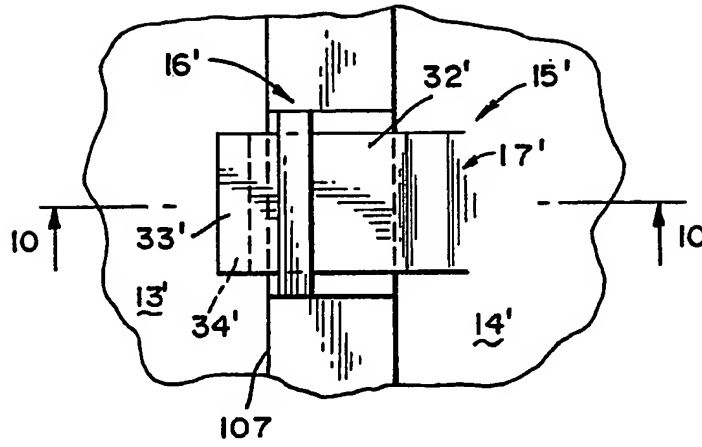


FIG. 9

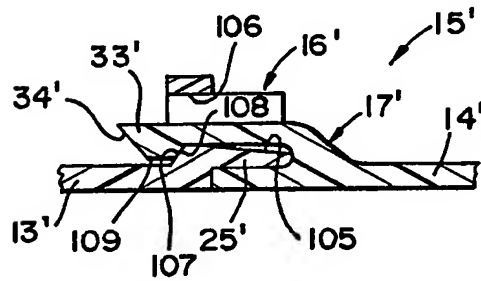


FIG. 10



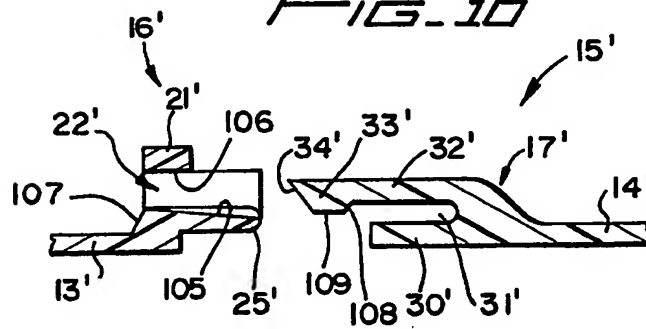



FIG. 11

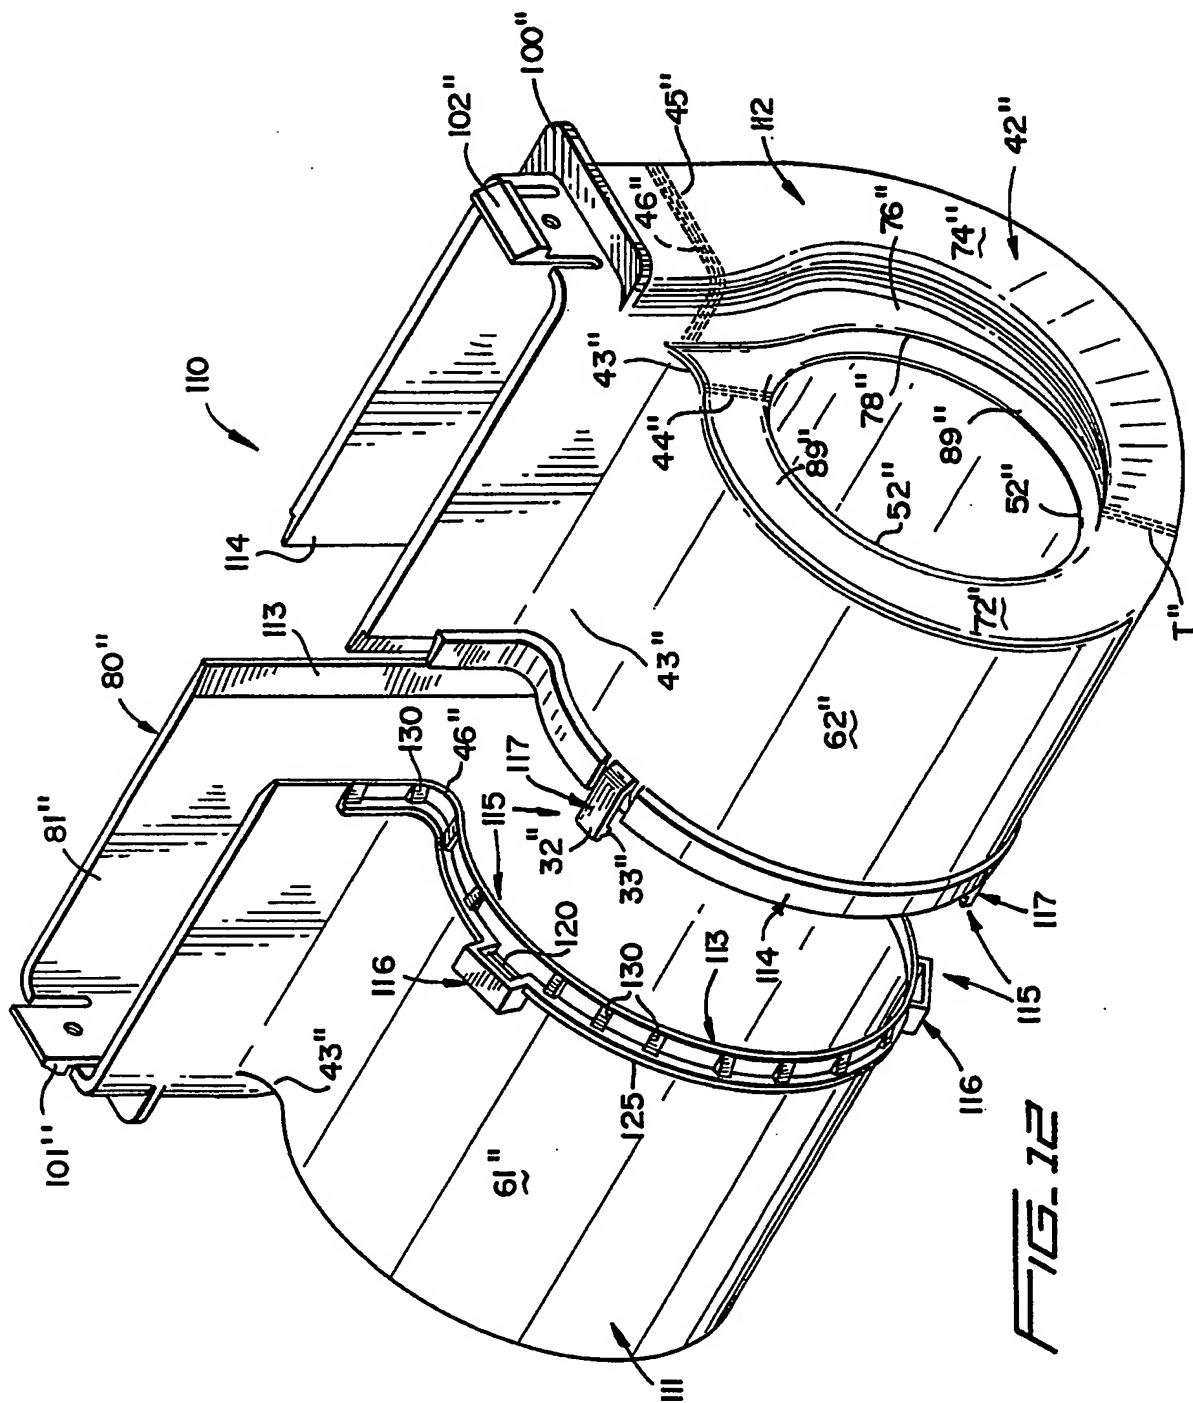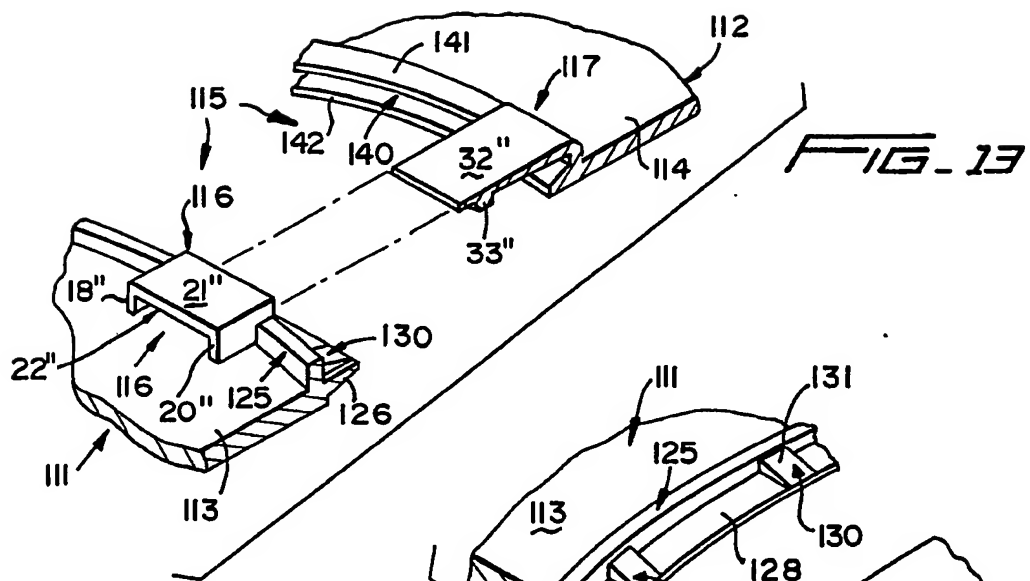

FILE 12



**FIG. 14**

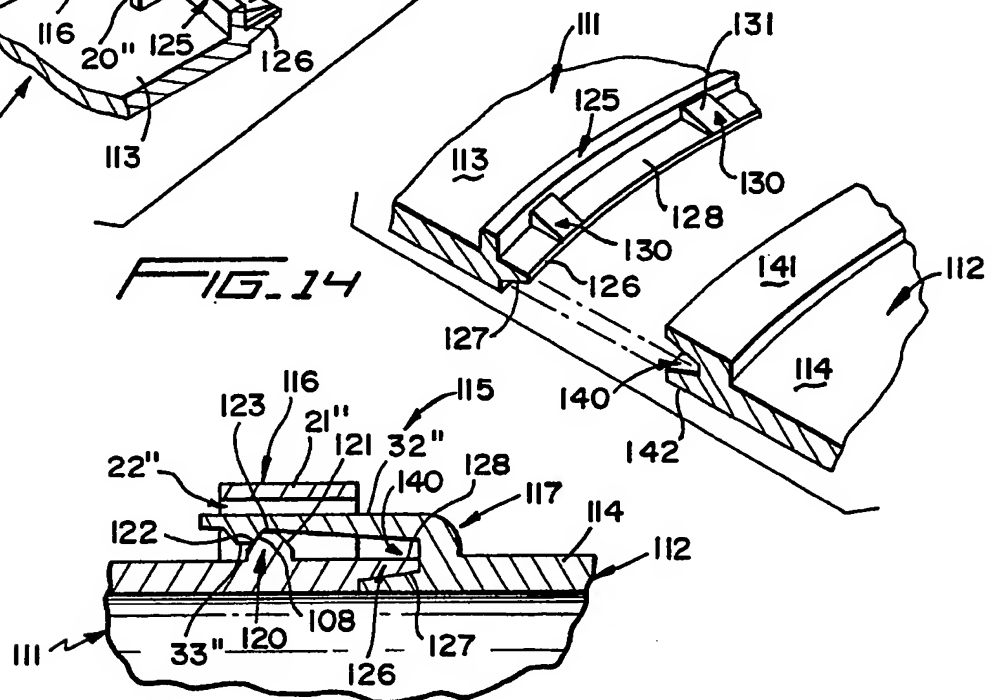

111

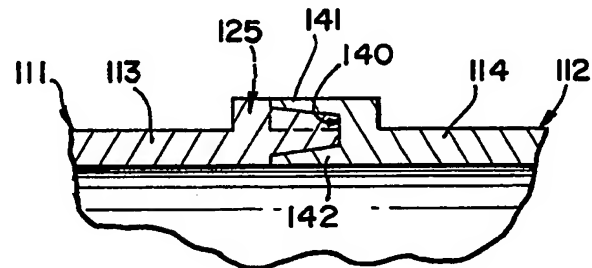


FIG. 16



A VOLUTE HOUSING FOR A CENTRIFUGAL FAN, BLOWER OR THE LIKE

This invention is directed to a volute housing for a centrifugal fan, blower or the like. The theory, design and application of such centrifugal fans can be found in the publications entitled "Turboblowers" by Alexey Joakim Stepanoff, published by John Wiley & Sons, Inc. and available at the Library of the University of Maryland, College Park, Maryland and "Fan Engineering" by Richard D. Madison, published by Buffalo Forge Company, Buffalo, New York (copyright 1949) and also available at the latter noted library. These publications describe several volute housing designs, including a constant velocity volute which is said to be the most favorable for efficiency because of the alleged fact that at the best efficiency point pressure is uniform around the volute. The latter condition is said to be the most desirable for impeller performance. In this design the entire recovery of the kinetic energy into pressure takes place in the volute nozzle which is preferably of a diverging relationship with the included angle being established experimentally at  $8^{\circ}$  for a circular cone to obtain the most efficient velocity convergent through the nozzle, though a range of  $6^{\circ}$  to  $10^{\circ}$  is acceptable. Beyond  $10^{\circ}$  efficiency is adversely affected. However, in such constant velocity volute housings, the volute pressure is constant until released by the discharge nozzle. The disadvantage of such constant velocity volute housings is that the capacity must be maintained at all times at its rated capacity, otherwise at partial capacities, pressure increases toward larger volute sections and decreases toward smaller volute sections. This decreases efficiency and increases noise.

In an abbreviated volute housing about one-quarter of the impeller periphery discharges directly into the discharge opening

without establishing normal volute pressure and velocity distribution prevailing in the remaining three-quarters of the controlled volute housing section. The disadvantage is that the average volute velocity may only be one-half of the absolute velocity at the impeller discharge. Thus sound is decreased but so too is efficiency.

In both the normal volute casing and the abbreviated volute casing, the sidewalls are substantially parallel to each other throughout and it is the peripheral volute wall which progressively diverges from the circular fluid inlet openings in a direction away from the cut-off point or tongue to the volute throat. Essentially, the volute peripheral wall ends at the volute throat and the volute throat defines the initiation or entrance of the discharge nozzle. It is in the area downstream of the throat that the discharge nozzle sidewalls are flared in a direction diverging away from each other in the direction of fluid travel. Such flaring can extend slightly downstream of the volute throat. Such volute casings or housings are generally constructed from galvanized metal and the divergent sidewall angles are extremely abrupt (20 - 45°) resulting in excessive turbulence and swirling of discharge fluid/air with an attendant increase in noise.

Another volute housing includes typical circular fluid inlet openings, a volute peripheral wall and sidewalls which continuously diverge from the cut-off point or tongue in the direction of fluid flow to the throat and beyond the discharge nozzle to the discharge opening or orifice. A volute housing so constructed is found in Pat. No. 3, 491,550 in the name of Thomas C. Cabis issued January 27, 1970. This construction increases the RPM's only, and effects expansion from the throat or cut-off point through 360° which basically creates a sound amplification structure typical of the curvature found in a tuba or a french horn. This creates a low

bass hum which amplifies the highest sound at the compression point or tongue which is the area of maximum (and virtually only) compression.

From the foregoing, each of the volute housings known suffer from two main disadvantages, namely, (a) low efficiency and (b) high noise.

In keeping with the foregoing, a primary object of the present invention is to provide a novel volute housing which is (a) highly efficient and (b) quiet.

The novel volute housing of the present invention includes a housing body defined by opposite spaced sidewalls, a generally circular fluid inlet opening in each sidewall with the fluid inlet openings having a coincident axis and a volute peripheral wall disposed between the sidewalls. The sidewalls each have a generally minimum radial dimension located at a first zone (throat/cut-off area) which progressively increases to a maximum radial dimension located at a second zone (volute throat). The arcuate distance between these first and second zones is generally 360°, and to this extent the volute housing just described constitutes a normal volute housing. However, in keeping with this invention the sidewalls each have first and second sidewall portions with a first sidewall portion of each sidewall extending arcuately from the first zone (cut-off point/tongue) generally 180° to a transition zone, and over this arcuate extent the first sidewall portions are generally parallel to each other. The sidewalls also have second sidewall portions which extend arcuately from the transition zone to the volute throat, and in keeping with the invention, the second sidewall portions are in diverging relationship in a direction away from the transition zone to the volute throat whereby fluid flowing through the housing body in a

direction from the transition zone toward the throat expands progressively axially outwardly as it flows between and along the second sidewall portions. This construction increases the efficiency of the volute housing and appreciably lessens sound/noise.

In further accordance with the present invention the housing body is preferably constructed from a pair of housing parts joined to each other along a radial plane generally normal to the coincident axis and between the sidewalls. Thus, the two housing parts can be rapidly interconnected to each other, preferably by cooperative male and female fasteners.

With the above and other objects in view that will hereinafter appear, the nature of the invention will be more clearly understood by reference to the following detailed description, the appended claims and the several views illustrated in the accompanying drawings.

FIGURE 1 is a perspective view of a novel volute housing constructed in accordance with this invention particularly adapted for utilization with a centrifugal fan, blower or the like, and illustrates a volute peripheral wall, a pair of sidewalls associated therewith, circular fluid inlet openings associated with each sidewall, and a sidewall portion which diverges progressively axially outwardly and in the direction of fluid flow between a transition zone ( $180^\circ$ ) and a volute throat (generally  $360^\circ$ ).

FIGURE 2 is an enlarged side elevational view of the volute housing of Figure 1, and illustrates structural details of the volute housing.

FIGURE 3 is an enlarged perspective view of the volute housing of Figures 1 and 2, and illustrates the construction thereof from two housing parts snapped together by male and female fasteners

with the volute housing being snap-secured in an opening of a convector tray or pan of a fan coil unit.

FIGURE 4 is an enlarged cross sectional view taken generally along line 4-4 of Figure 2, and illustrates the manner in which the sidewall portions of the volute housing body between approximately 180° and 360° diverge in a direction away from each other relative to the direction of fluid travel and toward the discharge nozzle opening.

FIGURE 5 is a cross sectional view taken generally along the line A-B of Figure 2 and laid out in a flat plane, and illustrates the generally parallel relationship of a first pair of sidewall portions between a tongue or cut-off point (0°) and a transition zone 180° removed, and the divergent relationship of a pair of second sidewall portions between the transition zone (180°) and another zone (throat) 360° from the cut-off point/tongue.

FIGURE 6 is an exploded fragmentary cross sectional view of one of several pairs of male and female fasteners, and illustrates the progressive sequence for snap-securing the same to each other.

FIGURE 7 is a fragmentary perspective view of two housing body parts of the volute housing body, and illustrates the axial alignment of a male and female fastener prior to securing the same to each other.

FIGURE 8 is a reduced fragmentary elevational view of the snap fasteners of Figure 7 and illustrates the male and female snap fasteners in assembled snap-secured relationship to each other.

FIGURE 9 is a fragmentary elevational view of another pair of male and female snap fasteners, and illustrates the fasteners in secured relationship to each other.

FIGURE 10 is a fragmentary cross sectional view taken generally along line 10-10 of Figure 9, and illustrates details of the secured fasteners.

FIGURE 11 is a fragmentary cross sectional view similar to Figure 10 and illustrates the snap fasteners in unfastened relationship to each other.

FIGURE 12 is a perspective view of another novel volute housing constructed in accordance with this invention, and illustrates a pair of volute housing bodies or parts having peripheral edges adapted to be snap-fastened to each other.

FIGURE 13 is a fragmentary enlarged view of a portion of the peripheral edges of the volute housing parts or halves, and illustrates axial alignment of male and female fasteners prior to securing the same to each other, and a nose of one peripheral edge aligned with a channel of the other peripheral edge.

FIGURE 14 is a fragmentary perspective view similar to Figure 13, and illustrates a plurality of circumferentially spaced reinforcing bosses carried by one of the peripheral edges.

FIGURE 15 is a fragmentary cross sectional view illustrating the assembled condition of the volute housing body and illustrates the fasteners interconnected to each other with a nose received in a slot or groove.

FIGURE 16 is a fragmentary cross sectional view similar to Figure 5, and illustrates the mating configuration between the groove and one of the bosses.

A volute housing for a centrifugal fan, blower or the like is best illustrated in Figures 1 - 5 of the drawings and is generally designated by the reference numeral 10.

The volute housing 10 includes a housing body defined by a pair of housing parts or halves 11, 12. The housing parts 11, 12 are joined to each other along a generally radial plane R (Figures 3 through 5) through interlocked edges 13, 14 (Figures 3 and 4).

The edges 13, 14 carry pairs of fasteners 15 defined by female

7

fasteners 16 carried by the edge 13 and male fasteners 17 carried by the edge 14 (Figures 2, 3, 6 - 8). The female fasteners 16 include a pair of radially projecting spaced legs 18, 20 (Figure 2) spanned by a bridge 21 and collectively defining a female opening 22. An undersurface 23 of the bridge 21 is curved to define a converging entrance (unnumbered) of the female opening 22. To the left and below each female opening 22, as viewed in Figures 6 and 7, is a ledge 24. Projecting to the right of the ledge 24, again as viewed in Figures 6 and 7, is an offset projection or nose 25 defining a terminal end of the edge 13 and a generally internal peripheral recess 26 thereof. A terminal end 30 of the edge 14 (Figures 6 and 7) is spaced by a gap or space 31 from a tongue or projection 32 ending in a radially inwardly directed locking lip 33. The locking lip 33 has an angled entrance surface 34 and a locking surface 35 which lies in a plane generally normal to an axis A (Figure 2) of the volute housing parts 11, 12 and generally circular fluid inlet openings 51, 52 in respective sidewalls 41, 42 (Figures 1 - 4). The width of the tongue 17 corresponds to the width of the female opening 22 (see Figure 8) and the thickness of the nose 25 corresponds to the radial width of the gap 31.

In order to assemble the housing parts 11, 12 into the volute housing 10 to the configuration shown in Figures 1 through 3, the two halves 11, 12 are aligned with each other with each of the tongues 32 aligned with an associated female opening 22 in the manner shown in Figure 6 (left-hand-most illustration). The two halves 11, 12 are then moved toward each other at which time the surface 34 moves along the nose 25 and is deflected slightly upwardly thereby eventually contacting the divergent portion (unnumbered) of the undersurface 23 of the bridge 21 as the nose 25 moves into the gap 31 (Figure 6, center illustration). In this fashion the bridge 21 prevents the tongue 32 from being deflected

excessively upwardly, and when finally mated, the inherent resilience of the tongue 32 causes the same to rebound to the right-hand-most position shown in Figure 6 at which time the locking surface 35 abuts against the ledge 24. In order to unlock the housing parts 11, 12 and disassemble the volute housing 10, the tongues 32 are deflected upwardly sufficiently for the surfaces 35 to clear the ledges 24 which is controlled by the undersurface 22 of the bridge 21. The bridge 21 also prevents each tongue 32 from being deflected excessively and being broken during the disengagement of the surfaces 35 from the ledges 24. Once the latter disengagement occurs, the housing parts 11, 12 can be simply pulled apart to disassemble the same.

The volute housing 10 includes a volute peripheral wall 60 defined by a volute peripheral wall portion 61 of the volute housing half or part 11 and a volute peripheral wall portion 62 of the volute housing part 12. The volute peripheral wall 60 extends generally from a volute tongue or cut-off 43 which is located generally at a first zone 44 of minimum radial dimension or distance relative to the openings 51, 52 to a second zone 45 located at a volute throat 46. The direction of fluid flow is counterclockwise relative to the volute peripheral wall 60, as viewed in Figure 2, and as is best illustrated in Figure 2, the sidewall 42 progressively increases in radial size in the direction of fluid travel from the first zone 44 of minimum radial dimension to the second zone 45 of maximum radial dimension. The arcuate distance between the first zone 44 and the volute tongue or cut-off point 43 and the second zone 45 or volute throat 46 in the direction of fluid flow is generally 360° (Figures 2 and 6).

Each of the sidewalls 41, 42 includes respective first sidewall portions 71, 72 and second sidewall portions 73, 74. The first sidewall portions 71, 72 are in generally parallel



relationship to each other (Figure 5) and extend approximately  $180^\circ$  from the first zone 44 to a transition zone T (Figures 2 and 5). As viewed in Figures 2 and 5, the transition zone T is located approximately  $180^\circ$  from the first zone 44 and tongue 43, as measured counterclockwise in Figure 2. Thus, fluid/air flow between generally the tongue or cut-off 43 and the first zone 44 up to the transition zone T will be confined radially against expansion by the generally parallel sidewall portions 71, 72. After the transition zone T and up to the second zone 45/volute throat 46, the second wall portions 73, 74 diverge away from each other in the direction of fluid flow, as is best illustrated in Figure 5. Thus, the fluid/air travelling from the transition zone T to the volute throat 46/second zone 45 will expand radially outwardly eventually exiting through a generally polygonal discharge nozzle 80 having a discharge opening 81. The cross sectional configuration at the volute throat 46 corresponds to the cross sectional configuration of the discharge opening 81 of the discharge nozzle 80, and thus between the volute throat 46 and the discharge opening 81, no further expansion of the fluid/air takes place.

Axial transition walls 75, 76 (Figures 1 through 4) bridge between the respective openings 51, 52 and the second sidewall portions 73, 74, respectively, of the sidewalls 41, 42, respectively. The axial transition walls 75, 76 merge very abruptly with the respective second sidewall portions 73, 74 at sharp radii or radius portions 77, 78, respectively (Figures 1, 2 and 4). The radii 77, 78 are relatively abrupt (Figure 4) and merge with less abrupt radii or radius portions 79, 89, respectively (Figures 1, 2 and 4). The axial transition walls 75, 76 and the respective radii 77, 78 begin at the transition zone T and progressively widen radially (see Figure 1) to the volute

throat 46/second zone 45. While the abrupt radii 77, 78 extend generally only between the transition zone T to the volute throat 46/second zone 45, the less abrupt radii 79, 89 extend a full 360° about the respective openings 51, 52 (Figures 1 and 4). Because of the latter construction a continuous uniform circumferential inlet cap is formed between an impeller (not shown) associated with the volute housing 10 and the gradual radii 79, 89 thereof. This causes uniform circumferential air flow into the volute housing 10 which balances not only the air flow, but in turn balances the torque on the impeller, its shaft and the associated drive motor (not shown) resulting in minimal vibration. The transition walls 75, 76 are generally in parallel relationship to the portions of the volute peripheral wall portions 61, 62 radially opposite thereto. Accordingly, as fluid/air flows between the transition zone T and the volute throat 46/second zone 45, the fluid/air can expand radially outwardly because of the divergent nature of the second wall portions 73, 74 but is constrained against radial expansion until reaching the volute throat 46/second zone 45.

From the foregoing, the radial cross section through the first zone 44 defines the minimum cross sectional volume of the volute fluid chamber (unnumbered) with, of course, the fluid chamber being established generally as that volume between the volute peripheral wall 60 and the inlet openings 51, 52 or the outer periphery of an impeller (not shown) mounted in the volute housing 10. This cross sectional volume progressively increases in the direction of fluid/air flow as, for example, in the direction of selected radial planes X-X, Y-Y, Z-Z, etc. until reaching a maximum at the transition zone T. However, during the enlargement of the volumes between generally 0° and 180°, all of the enlargement of chamber volume is through radial expansion and not through axial expansion because of the generally parallel relationship of the first

11

sidewall portions 71, 72 of the respective sidewalls 41, 42. However, the cross sectional volume of the air/fluid chamber beginning at the transition zone T progressively increases toward the second zone 45/volute throat 46, not only radially but also axially, because of the progressive divergence of the second sidewall portions 73, 74 toward and to the volute throat 46/second zone 45. At the latter zone the cross sectional volume remains generally unchanged as it passes through the discharge nozzle 80 exiting the discharge opening 81 thereof. Due to the divergence of the second sidewall portions 73, 74 in conjunction with the transition walls 75, 76 between the transition zone T and the second zone 45/volute throat 46, the efficiency of the overall volute housing 10 is increased while the noise/sound is decreased even though uniform compression is maintained only over approximately  $0^{\circ}$  -  $180^{\circ}$  from the first zone 44 to the transition zone T. However, releasing the compression and providing expansion from the transition zone T toward discharge particularly in an axial direction, has achieved efficiency beyond that heretofore obtained at noticeably decreased noise levels.

The volute housing 10 is also provided with an abutment flange 100 (Figures 1 and 3) which extends about the exterior of the discharge nozzle 80 downstream from the discharge opening 81. The flange 100 abuts against the bottom of a convection tray C (Figure 3) in the manner fully described in applicant's pending Application Serial No. 07/459,222 filed December 29, 1989 and entitled "A Fan Coil Unit." The specifics of the latter, including details of oppositely directed connected tongues or flanges 101, 102 are herein incorporated by reference. However, in addition to the flanges or tongues 101, 102, openings 103, 104 are formed in the discharge nozzle 80 immediately adjacent and below each of the flanges or tongues 101, 102 through which fasteners F (Figure 3)

can be connected to suspendingly secure the volute housing 10 to the convector tray C.

Reference is now made to Figure 4 which illustrates a modification of the invention in which transition walls 75', 76' are not parallel to the volute peripheral wall 60 but instead are modified to gradually flare from the respective openings 51, 52 toward the respective volute peripheral wall portions 61, 62 of the volute peripheral wall 60. The transition walls 75', 76' now gradually blend with the transition radii 77, 78 between the transition walls 75', 76' and the less abrupt radii 79, 89, respectively, resulting in less cavitation, less noise and still greater efficiency than the more abrupt (90°) transition earlier described between the walls 73, 75 and 74, 76..

Reference is now made to Figures 9 through 11 of the drawings which illustrates another pair of fasteners 15' which have been primed to designate structure substantially identical to that of the pairs of fasteners 15. In this case a female fastener 16' includes an offset projection or nose 25' but an upper surface 105 thereof is inclined downwardly and to the right, as viewed in Figures 10 and 11. An undersurface 106 of a bridge 21' is not provided with a converging entrance surface, as in the case of the undersurface 23 of the bridge 21. Furthermore, a ledge 107 is slightly inclined upwardly and to the right as viewed in Figures 10 and 11, as opposed to the generally normal disposition of the ledge 24 relative to the edge 13 of the female fastener 16 (Figure 6). The male tongue or projection 32' includes a locking lip 33' and a forward inclined surface 34'.. However, a rearward surface 108 is inclined and a bottommost surface 109 is generally flat. Thus the locking lip 33' is not pointed, as in the case of the locking lip 33 of Figure 6.

In order to fasten the fasteners 16', 17', the tongue 32' is moved to the left, as viewed in Figure 11, and the surface 109 is progressively guided by the surface 105 to feed the locking lip 33' through the female opening 22' which also progressively deflects the tongue 32' upwardly toward and against the underside 106 of the bridge 21'. The bridge 21' prevents the tongue 32' from being over deflected during this fastening operation, and once the locking lip 33' moves beyond the female opening 22', the surfaces 107, 108 lockingly engage each other (Figure 9) with sufficient force to maintain the fastening means 15' assembled. However, since the surfaces 107, 108 are inclined, release thereof is easier than that heretofore described in conjunction with the surface 35 and ledge 24 of the pair of fasteners 15 which are generally normal to the direction of disassembly. The latter is readily apparent by merely comparing Figure 10 with the right-hand-most illustration of Figure 6. However, even with the tapered surfaces 107, 108, the grip is sufficiently adequate to assure that the volute housing 10 is maintained in its assembled condition.

Another volute housing constructed in accordance with this invention is illustrated in Figure 12 and is generally designated by the reference numeral 110.

Structure of the volute housing 110 which is identical to that of the volute housing 10 has been double primed.

The volute housing 110 includes a housing body defined by a pair of housing parts or halves 111, 112. The housing parts 111, 112 are joined to each other along a generally radial plane (unnumbered) corresponding to the radial plane R of Figures 3 - 5. The housing parts 11, 12 are joined to each other along the radial plane through interlocked edges 113, 114 through pairs of fasteners 115 defined by female fasteners 116 carried by the edge 113 and male fasteners 115 carried by the edge 114.

The female fasteners 116 each include a pair of radially projecting spaced legs 18", 20" (Figure 13) spanned by a bridge 21" and collectively defining a female opening 22". Within each female opening 22" and spaced beneath the bridge 21" thereof is located a generally radially outwardly directed circumferentially extending locking rib 120 having a first inclined surface or face 121, a second inclined surface or face 122, and a top surface or face 123 therebetween. Each of the male fasteners 117 is substantially identical to the male fastener 17' of Figures 9 through 11, and includes a tongue or projection 32", a radially inwardly directed locking lip 33" and a surface 108" which locks against the surface 122 of the locking rib 120 when the pairs of fasteners 115 are fastened together in the manner clearly evident in Figure 15. The assembly and disassembly of the pairs of fasteners 115 need not be described further since the same corresponds to that heretofore described relative to the pairs of fasteners 15' of Figures 9 through 11.

The edge 113 also includes a circumferentially extending radially outwardly directed reinforcing rib 125 forward from which projects a nose 126 having a tapered bottom surface 127 and a relatively flat upper surface 128 (Figure 14 and 15). A plurality of reinforcing bosses 130 are spaced peripherally from each other, and each includes an upper tapered surface 131. The surfaces 127, 131 merge at a circumferential flat front surface or face 132. The surfaces 127, 131 and 132 are of a transverse cross sectional configuration (Figure 16) which corresponds to an axially outwardly opening groove or channel 140 defined between a pair of flanges 141, 142 (Figures 13 and 16) of the edge 114. The surfaces (unnumbered) of the channel or groove 140 mates with the surfaces 127, 131 and 132, and lends rigidity to the volute housing 110 when the volute parts 111, 112 are held together by the fasteners 115.

Since the volute housing parts 111, 112 are formed from injection molded plastic, the tendency thereof is to deflect or warp, particularly along the edges 113, 114 unless otherwise provided for. The spaced bosses 130 and the rib 125 provide both axial and circumferential rigidity to the edge 113 which prevents the same from warping and thus maintains its rigidity over the lifetime thereof. Obviously since the edge 113 is extremely rigid and relatively nondeflectable, once the interlock of Figures 15 and 16 is effected between the nose 126 and the groove 140, the rigidity inherent in the edge 113 also rigidifies the interlock and thus the overall connection about the entire periphery of the housing parts 11, 112 along the entire interlock edges 113, 114.

Though the volute housings 10 (Figure 1) and 110 (Figure 12) have been described as being formed of two volute parts or bodies 11, 12 and 111, 112, respectively, the same can be made of more numbers of parts, though the same are preferably divided along planes parallel to the radial plane R (Figures 3 and 4). For example, two planes R1, R2 (Figures 3 and 4) are illustrated, one to either side of the radial plane R. In accordance with this invention the entire portion of the volute housing 10 located between the radial planes R1, R2 could be a single piece of injection molded plastic material, as would be the housing portions to the left and right of the radial planes R1, R2, respectively. These three parts then could be glued together or adjoining parts could be provided with pairs of fasteners, such as the fasteners 15. As an alternative construction, the parts of the volute housing 10 to the left and right, respectively, of the radial planes R1, R2 can be made of injection molded plastic material, whereas the part of the volute housing 10 between the radial planes R1, R2 can be made of galvanized metal. The peripheral edges of the housing parts to the left and right of the radial planes R1,

R2, respectively, could be provided with grooves into which would be received the peripheral edges of the galvanized central part, and these could all be appropriately glued to each other. In this fashion one need but mold opposite axial ends of the volute housing 10 and a central portion could be varied in axial length to accommodate different impellers of different axial length.

Although a preferred embodiment of the invention has been specifically illustrated and described herein, it is to be understood that minor variations may be made in the apparatus without departing from the spirit and scope of the invention as defined in the appended claims.



17

CLAIMS

1. A volute housing for a centrifugal fan, blower or the like comprising a housing body defined by opposite spaced sidewalls, a generally circular fluid inlet opening in each sidewall, said generally circular fluid inlet openings having a coincident axis, a volute peripheral wall disposed between said sidewalls and defining therewith a volute chamber, said sidewalls each having a generally minimum radial dimension located at a first zone adjacent a tongue of said volute chamber and progressively increasing to a maximum radial dimension located at a second zone adjacent a throat of said volute chamber, the arcuate distance between said first and second zones being beyond 270 degrees, said sidewalls each having a first sidewall portion extending arcuately from said first zone generally 180 degrees to a transition zone, said first sidewall portions being in generally parallel relationship to each other between said first and transition zones, said sidewalls each having a second sidewall portion extending arcuately from said transition zone generally to said volute throat, and said second sidewall portions are in diverging relationship in a direction away from said transition zone toward said volute throat whereby fluid flowing through said housing body in a direction from said first zone toward said throat expands progressively axially outwardly as it flows between and along said second sidewall portions.

2. The volute housing as defined in claim 1 wherein the arcuate distance between said first and second zones is beyond 300 degrees.

3. The volute housing as defined in claim 1 wherein the arcuate distance between said first and second zones is generally 360 degrees.

4. The volute housing as defined in claim 1 wherein said second sidewall portion of each sidewall includes generally radially inboard and radially outboard portions and a generally axial transition wall between said radially inboard and outboard second sidewall portions.

5. The volute housing as defined in claim 1 wherein said second sidewall portion of each sidewall includes generally radially inboard and radially outboard portions and a generally axial transition wall between said radially inboard and outboard second sidewall portions, and each of said transition walls diverges in a direction away from said transition zone toward said volute throat.

6. The volute housing as defined in claim 1 including a discharge nozzle downstream from said second zone.

7. The volute housing as defined in claim 1 including a discharge nozzle downstream from said second zone, and said discharge nozzle being of a generally polygonal cross sectional configuration as viewed generally normal to the direction of fluid flow.

8. The volute housing as defined in claim 1 including a discharge nozzle downstream from said second zone, and a radially outwardly directed flange carried by said discharge nozzle.

9. The volute housing as defined in claim 1 including a discharge nozzle downstream from said second zone, and a pair of oppositely directed locking tongues carried by said discharge nozzle.

10. The volute housing as defined in claim 1 including a discharge nozzle downstream from said second zone, and a pair of outwardly and oppositely directed locking tongues carried by said discharge nozzle.

11. The volute housing as defined in claim 1 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls.

12. The volute housing as defined in claim 1 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

13. The volute housing as defined in claim 3 wherein said second sidewall portion of each sidewall includes generally radially inboard and radially outboard portions and a generally axial transition wall between said radially inboard and outboard second sidewall portions.

14. The volute housing as defined in claim 3 wherein said second sidewall portion of each sidewall includes generally radially inboard and radially outboard portions and a generally axial transition wall between said radially inboard and outboard second sidewall portions, and each of said transition walls diverges in a direction away from said transition zone toward said volute throat.

15. The volute housing as defined in claim 3 including a discharge nozzle downstream from said second zone, and said discharge nozzle being of a generally polygonal cross sectional

configuration as viewed generally normal to the direction of fluid flow.

16. The volute housing as defined in claim 3 including a discharge nozzle downstream from said second zone, and a radially outwardly directed flange carried by said discharge nozzle.

17. The volute housing as defined in claim 3 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls.

18. The volute housing as defined in claim 3 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

19. The volute housing as defined in claim 4 wherein the arcuate distance between said first and second zones is generally 360 degrees.

20. The volute housing as defined in claim 4 including a discharge nozzle downstream from said second zone, and a radially outwardly directed flange carried by said discharge nozzle.

21. The volute housing as defined in claim 4 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls.

22. The volute housing as defined in claim 4 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

23. The volute housing as defined in claim 5 wherein the arcuate distance between said first and second zones is generally 360 degrees.

24. The volute housing as defined in claim 5 including a discharge nozzle downstream from said second zone, and a radially outwardly directed flange carried by said discharge nozzle.

25. The volute housing as defined in claim 5 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls.

26. The volute housing as defined in claim 5 wherein said housing body is defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally

axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

27. A volute housing for a centrifugal fan, blower or the like comprising a housing body defined by opposite spaced sidewalls, a generally circular fluid inlet opening in each sidewall, said generally circular fluid inlet openings having a coincident axis, a volute peripheral wall disposed between said sidewalls and defining therewith a volute chamber, said sidewalls each having a generally minimum radial dimension located at a first zone adjacent a tongue of said volute chamber and progressively increasing to a maximum radial dimension located at a second zone adjacent a throat of said volute chamber, said housing body being defined by a pair of housing parts joined to each other along opposing peripheral edges at a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

28. The volute housing as defined in claim 27 wherein one of said peripheral edges includes a generally peripherally extending axially opening channel, and another of said peripheral edges includes a generally peripherally extending axially projecting nose, and said nose is seated in said channel.

29. The volute housing as defined in claim 27 including a plurality of peripherally spaced axially projecting means carried by said another peripheral edge for reinforcing the same.

30. A volute housing for a centrifugal fan, blower or the like comprising a housing body defined by opposite spaced sidewalls, a generally circular fluid inlet opening in each sidewall, said generally circular fluid inlet openings having a coincident axis, a volute peripheral wall disposed between said sidewalls and defining therewith a volute chamber, said sidewalls each having a generally minimum radial dimension located at a first zone adjacent a tongue of said volute chamber and progressively increasing to a maximum radial dimension located at a second zone adjacent a throat of said volute chamber, said housing body being defined by a pair of housing parts joined to each other along a radial plane generally normal to said coincident axis and between said sidewalls, at least one male fastener carried by one of said housing parts and at least one female fastener carried by the other of said housing parts, said female fastener being defined by a pair of generally radially outwardly projecting legs and a bridge therebetween defining a female opening, a ledge adjacent said opening, said male fastener including a generally axially projecting tongue aligned for entry into and removal from said female opening, and a generally radially inwardly directed lip carried by said tongue which is adapted to lock against said ledge.

31. The volute housing as defined in claim 30 wherein said ledge is disposed within said opening.

32. The volute housing as defined in claim 30 wherein said ledge and tongue have respective locking surfaces which are in abutment with each other when said tongue and ledge are locked together, and said locking surfaces are disposed in transverse nonnormal relationship to said coincident axis.

33. The volute housing as defined in claim 31 wherein said ledge and tongue have respective locking surfaces which are in abutment with each other when said tongue and ledge are locked together, and said locking surfaces are disposed in transverse nonnormal relationship to said coincident axis.

34. A volute housing for a centrifugal fan, blower or the like comprising a housing body defined by opposite spaced sidewalls, a generally circular fluid inlet opening in each sidewall, said generally circular fluid inlet openings having a coincident axis, a volute peripheral wall disposed between said sidewalls and defining therewith a volute chamber, said sidewalls each having a generally minimum radial dimension located at a first zone adjacent a tongue of said volute chamber and progressively increasing to a maximum radial dimension located at a second zone adjacent a throat of said volute chamber, the arcuate distance between said first and second zones being beyond 270 degrees, said sidewalls each having a first sidewall portion extending arcuately from said first zone generally 180 degrees to a transition zone, said first sidewall portions being in generally parallel relationship to each other between said first and transition zones, said sidewalls each having a second sidewall portion extending arcuately from said transition zone generally to said volute throat, said second sidewall portions being in diverging relationship in a direction away from said transition zone toward said volute throat whereby fluid flowing through said housing body in a direction from said first zone toward said throat expands progressively axially outwardly as it flows between and along said second sidewall portions, each of said fluid openings being defined by a relatively gradually rounded radius portion extending substantially 360 degrees, a relatively abrupt radius portion disposed between each of said gradually rounded radius portions and



an associated second sidewall portion, and said relatively abrupt radius portions each extend circumferentially generally from said transition zone toward said volute throat.

35. The volute housing as defined in claim 34 wherein said second sidewall portion of each sidewall includes generally radially inboard and radially outboard portions and a generally axial transition wall between each radially outboard second sidewall portion and an adjacent relatively abrupt radius portion.

36. The volute housing as defined in claim 35 wherein the arcuate distance between said first and second zones is beyond 300 degrees.

37. The volute housing as defined in claim 35 wherein the arcuate distance between said first and second zones is generally 360 degrees.

38. A volute housing for a centrifugal fan blower or the like and substantially as hereinbefore described with reference to, and as illustrated by, the accompanying drawings.

26 -

**Patents Act 1977**  
**Examiner's report to the Comptroller under**  
**Section 17 (The Search Report)**

**Application number**  
 9123802.2

**Relevant Technical fields**

(i) UK Cl (Edition K ) F1C (CFE) (CFS) (CFJ)

(ii) Int Cl (Edition 5 ) F04D 29/40, 29/42, 29/66

**Databases (see over)**

(i) UK Patent Office

(ii) ONLINE DATABASES: WPI

**Search Examiner**

M D WALKER

**Date of Search**

31 MARCH 1992

Documents considered relevant following a search in respect of claims 1-26, 34-37

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
A	GB 2181183 A (HUNTER) Page 2 lines 100-200	11,12
A	GB 989348 (AMERICAN...) Page 1 line 89 to page 2, line 25	1
A	US 3491550 (CAVIS) Figure 1	1

Category	Identity of document and relevant passages	Relevant to claim(s)

### Categories of documents

**X:** Document indicating lack of novelty or of inventive step.

**Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.

**A:** Document indicating technological background and/or state of the art.

**P:** Document published on or after the declared priority date but before the filing date of the present application.

**E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.

**&:** Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).